

1 LADDER, ∞ JOBS.

1. MULTI-POSITION LADDER

Multi-position ladder easily converts to A-frame, extension, 90-degree, staircase and trestle-and-plank* scaffolding configurations.

2. ROCK LOCK[®]

Easy-to-use Rock Lock[®] adjusters move the inner section of the ladder to the height you need.


3. TIP & GLIDE[™] WHEELS

Tip & Glide[™] wheels allow for smooth ladder transportation.

4. TWO-PERSON STEPLADDER

Meets AS1892.1:2018 standards. In A-Frame position, it holds 150kg on both sides.

*Trestle brackets and Plank[™] sold separately.





A-Frame



90-Degree




Extension



Tip & Glide™ Wheels



Storage Position

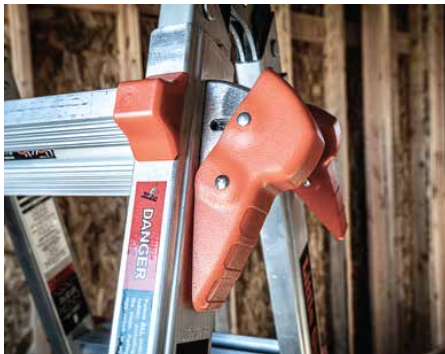

Rock Locks®

PRODUCT DESCRIPTION

The Velocity ladder meets or exceeds AS1892.1:2018 and is rated Type IA to hold 150kg. If you need a rugged, do-it-all ladder, it is the perfect piece of climbing equipment. This lightweight, multi-position ladder will help you get stuff done faster and more efficiently than the average stepladder.

Lifetime Limited Warranty • 150kg Australian Industrial Rating AS1892.1:2018

Part Number	Model	Stepladder Size Min-Max	Stepladder Highest Standing Level Min-Max	Stepladder Max Reach*	Extension Size Min/Max	Extension Highest Standing Level Min-Max	Extension Max Reach*	Storage Height	Storage Depth	Weight
15413-440	13	1.1m - 1.7m	30cm - 90cm	2.9m	3.4m	2.1m - 3.35m	4.3m	1.1m	20cm	16kgs
15417-440	17	1.4m - 2.3m	60cm - 1.5m	3.4m	4.6m	2.7m - 4.55m	5.5m	1.4m	20cm	19kgs
15422-440	22	1.7m - 2.9m	90cm - 2.0m	4.0m	5.8m	3.3m - 5.75m	6.7m	1.7m	20cm	22kgs
15426-440	26	2.0m - 3.5m	1.2m - 2.6m	4.6m	7.0m	3.95m - 7.0m	7.8m	2.0m	20cm	26kgs

*A 1.7m tall person with a 30cm vertical reach